



Individual task:


- Drag for a 2D object:

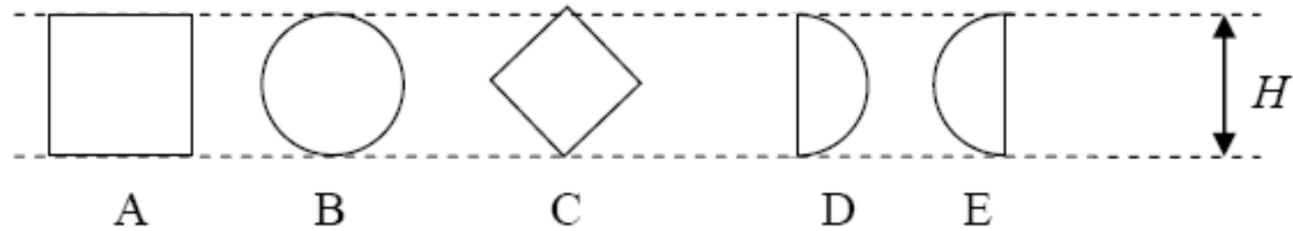

Reynolds no. dependency

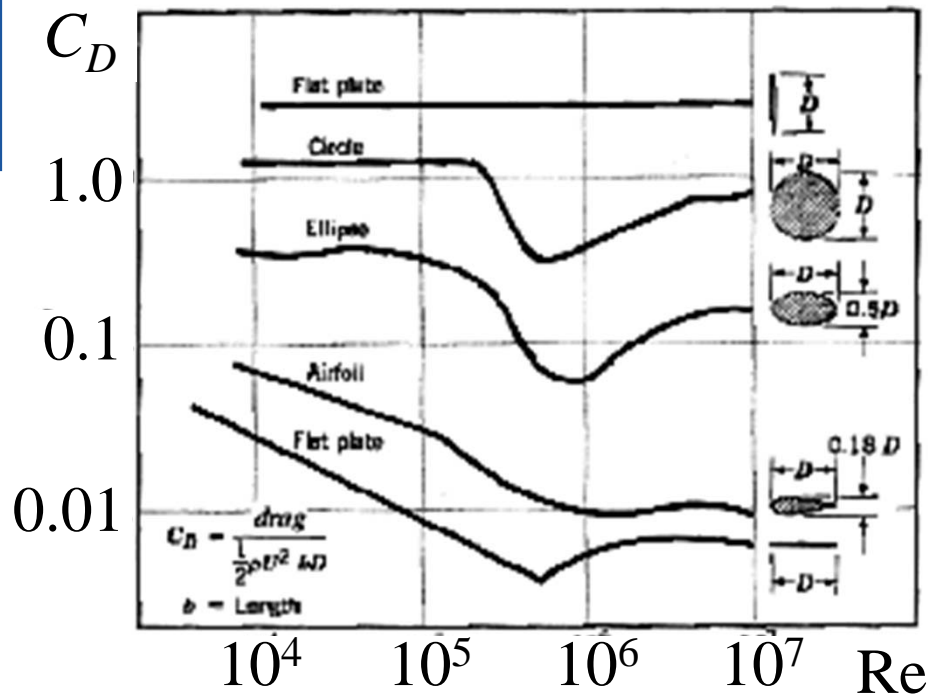


Re=0.2



No separation

(A)

Re=12

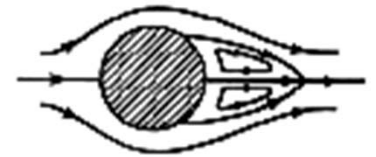

Steady separation bubble

(B)

Re=120



Oscillating Karman vortex street wake

(C)

Re=30.000



Laminar boundary layer
wide turbulent wake





(D)

Re=500.000



Turbulent boundary layer
narrow turbulent wake


(E)

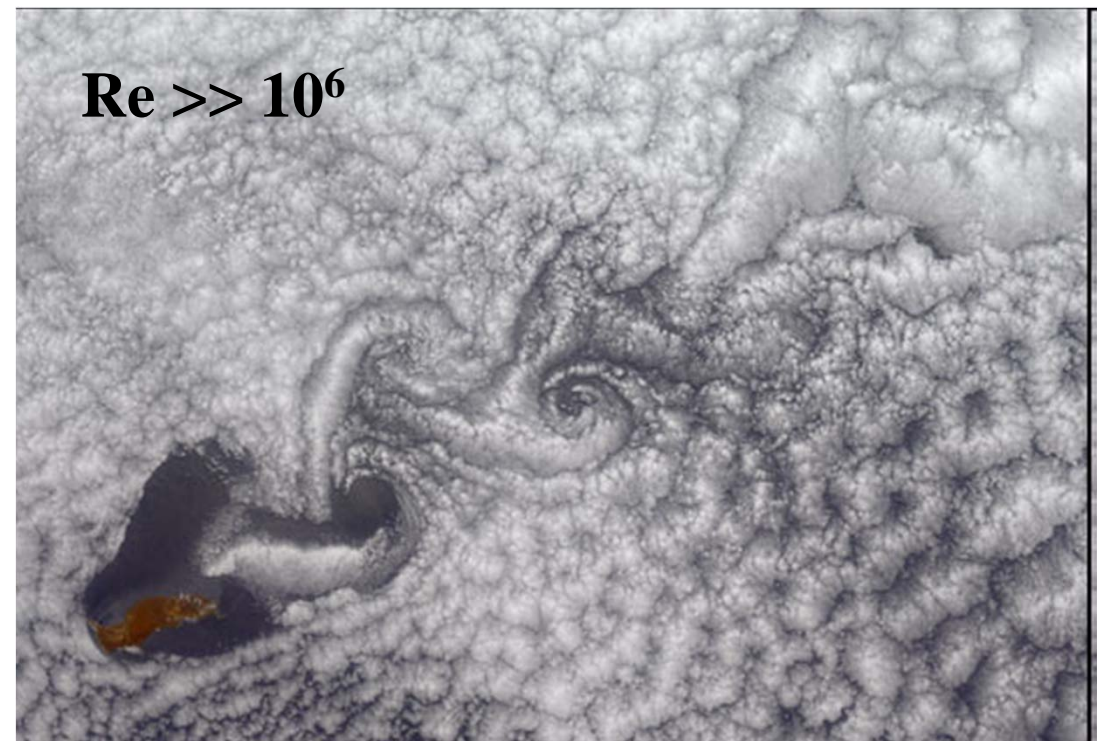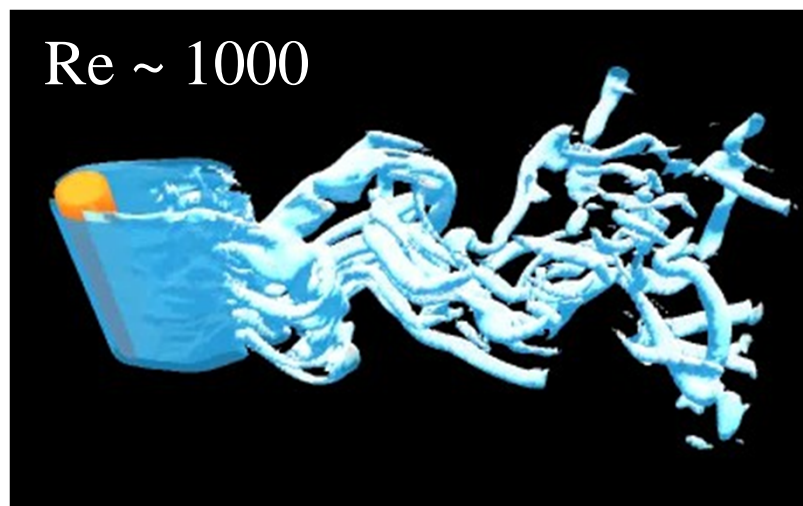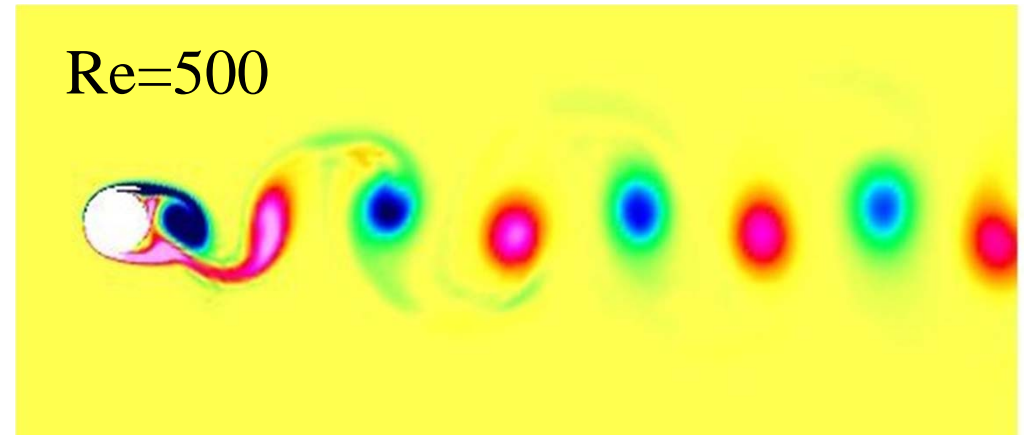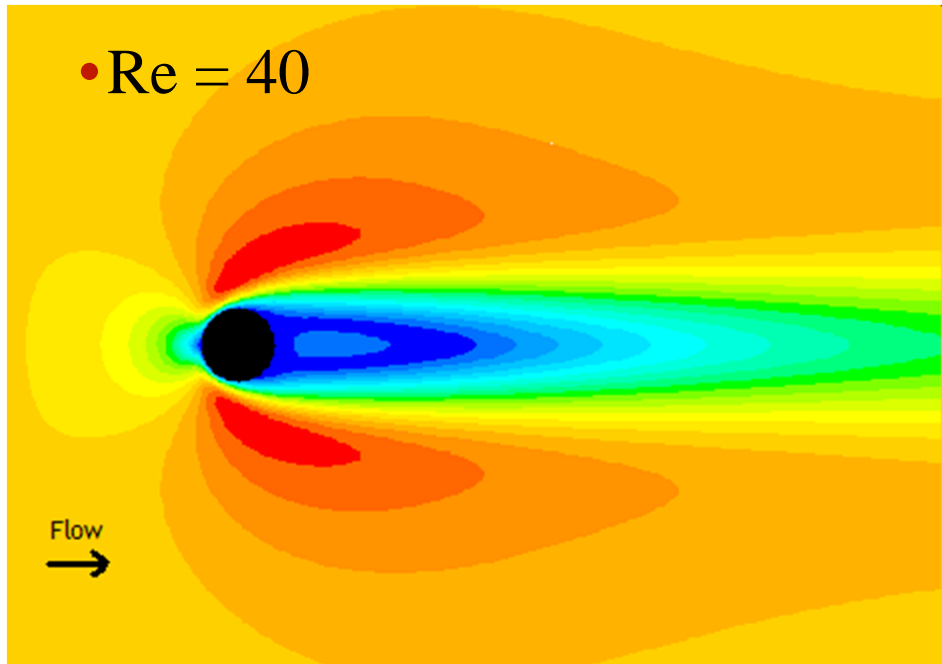

What to do:

- Objective

To derive the drag coefficient for a 2D object

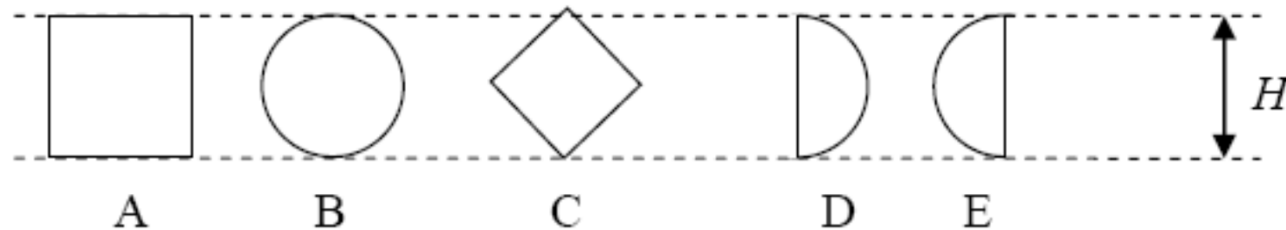

- Setting

- Choose object
- Choose $Re = 10^4, 10^5$ or 10^6
- Incompressible: $Ma < 0.1$

- Derive

- Drag coefficient
- Grid and flow pictures

- Different approximations – no "correct answer"



When:



- Preparation for lecture 2 (31/3):
Sketch, Physical model, Reynolds number
- During lecture 2 (31/3):
Determine the grid resolution requirements
- Before 18/4:
Compute the case using Fluent
Upload on bilda
- During lecture 5 (20/4):
I will compare the different results – feedback

Lecture 2...



Group discussion – 15 min

Your individual task:



- Discuss your sketches
 - Expected flow field
- Design the grid
 - Boundary layer thickness, δ
 - Δy close to wall for
 - (i) log-law BC ($y^+ > 20$ AND $y < 0.1\delta$)
 - (ii) no-slip BC ($y^+ = 1$)
 - Use air, $\nu = 1.8e-5 \text{ m}^2/\text{s}$
 - Guess L – derive U for chosen Re_L

... one solution



- Choose Re , e.g. $Re=10^5$
- Choose a cylinder, e.g. $D=H=0.1\text{m}$
 - $U = Re \nu / H = 18 \text{ m/s}$
- Boundary layer will develop from stagnation point to max width.
 - That distance, x , is around 0.04m
 - $Re_x = 4 \times 10^4$
- Assuming turbulent boundary layer
 - The figure gives: $C_f = 0.007$ and $\delta/x = 0.04$
 - C_f definition $\rightarrow u_\tau = 1.1 \text{ m/s}$
 - Boundary layer thickness $\delta = 0.04x = 1.6 \text{ mm}$
 - y^+ definition $\rightarrow y=y^+\nu / u_\tau$ gives:
 $y^+=1 \rightarrow y=0.016\text{mm}$ and $y^+=20 \rightarrow y=0.3\text{mm}$
- OBS: Std. wall function BC cannot be used here. Why?
 - Thickness of the first cell: y_1
 - 1st req for WF: $y_1^+ > 20$ gives $y_1 > 0.3\text{mm}$
 - 2nd req for WF: $y_1 < 0.1\delta$ gives $y_1 < 0.16\text{mm}$