



ROYAL INSTITUTE  
OF TECHNOLOGY

# Project specifications

☰ DH2323 > Assignments

Home

Search for assignment

Announcements

**Assignments**

Discussions

Grades

People

Pages

Files

Syllabus

☰ ▾ Assignments

☰ ▾ Preliminary submissions



**Project Specification**

Available until 13 May | Due 30 Apr at 23:59

Canvas is now open for preliminary project specification submission!



ROYAL INSTITUTE  
OF TECHNOLOGY

# Project specifications

- 1) Make sure to include your intended grade in the specification (e.g. A-B grade, basic pass, etc), since this has a large impact on the type of feedback that we may provide.
- 2) You are not graded on your preliminary project specification. It is an opportunity for you to receive feedback from the course team on your project idea. It is strongly recommended that you do it, especially if you are seeking higher grades in the course.
- 3) You can change your project specification any time you wish. It does not represent a promise by you to complete anything that you mention in it i.e. it is meant to be a helpful method for you to communicate and develop your project idea.
- 4) You should iteratively improve and add more detail to your specification and resubmit to get updated feedback. The more detail that you can provide about your assignment, the better the feedback that we can usually provide to you.
- 5) The format is up to you. We suggest that you start off with sending us a basic idea and then add detail from there.



ROYAL INSTITUTE  
OF TECHNOLOGY

DH2323 DGI18

INTRODUCTION TO  
COMPUTER GRAPHICS AND  
INTERACTION

# LIGHTING AND SHADING

Christopher Peters

CST, KTH Royal Institute of Technology,  
Sweden

[chpeters@kth.se](mailto:chpeters@kth.se)

<http://kth.academia.edu/ChristopherEdwardPeters>


# Image Synthesis

In computer graphics, create images based on a *model*

Recall:

An underlying process generates observations

Can control generation through parameters

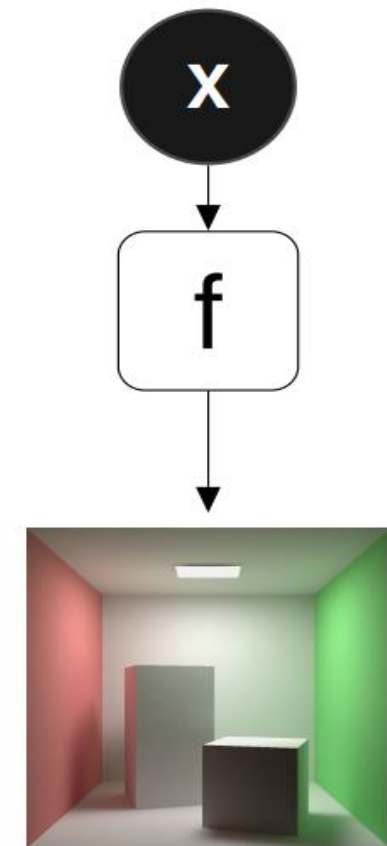

# Nice Results

"Distant Shores" by Christoph Gerber







"Christmas Baubles" by Jaime Vives Piqueres



"Still with Bolts" by Jaime Vives Piqueres


# Some Constituents I

- Light
- Geometry
- Surface properties
- Anything else?

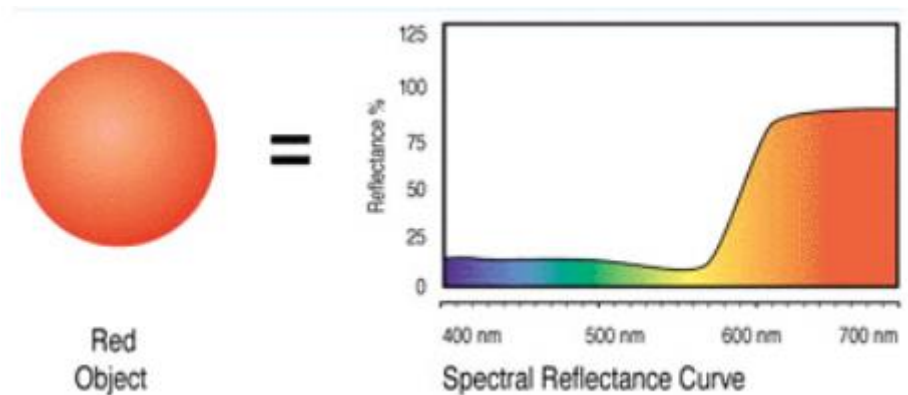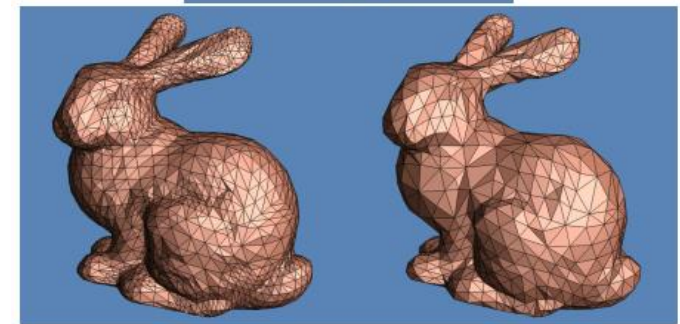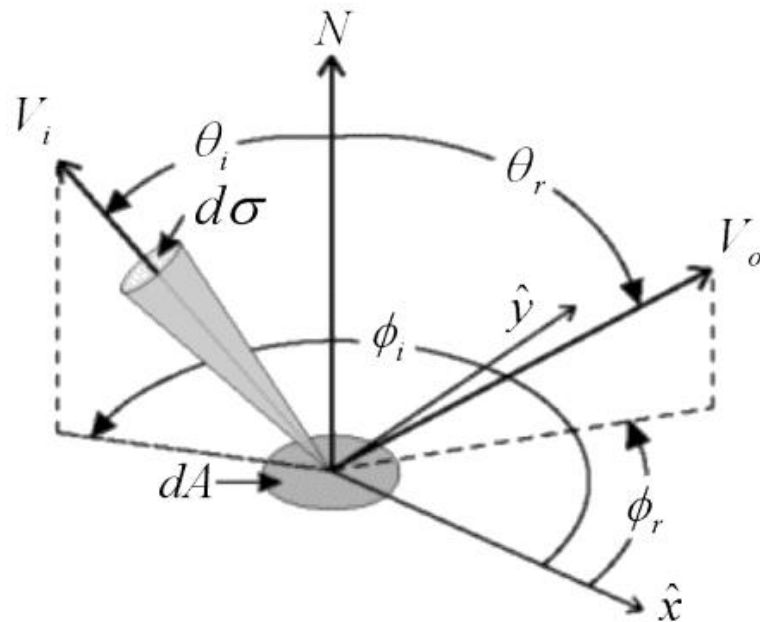

# Some Constituents II

- Camera Model (pinhole)

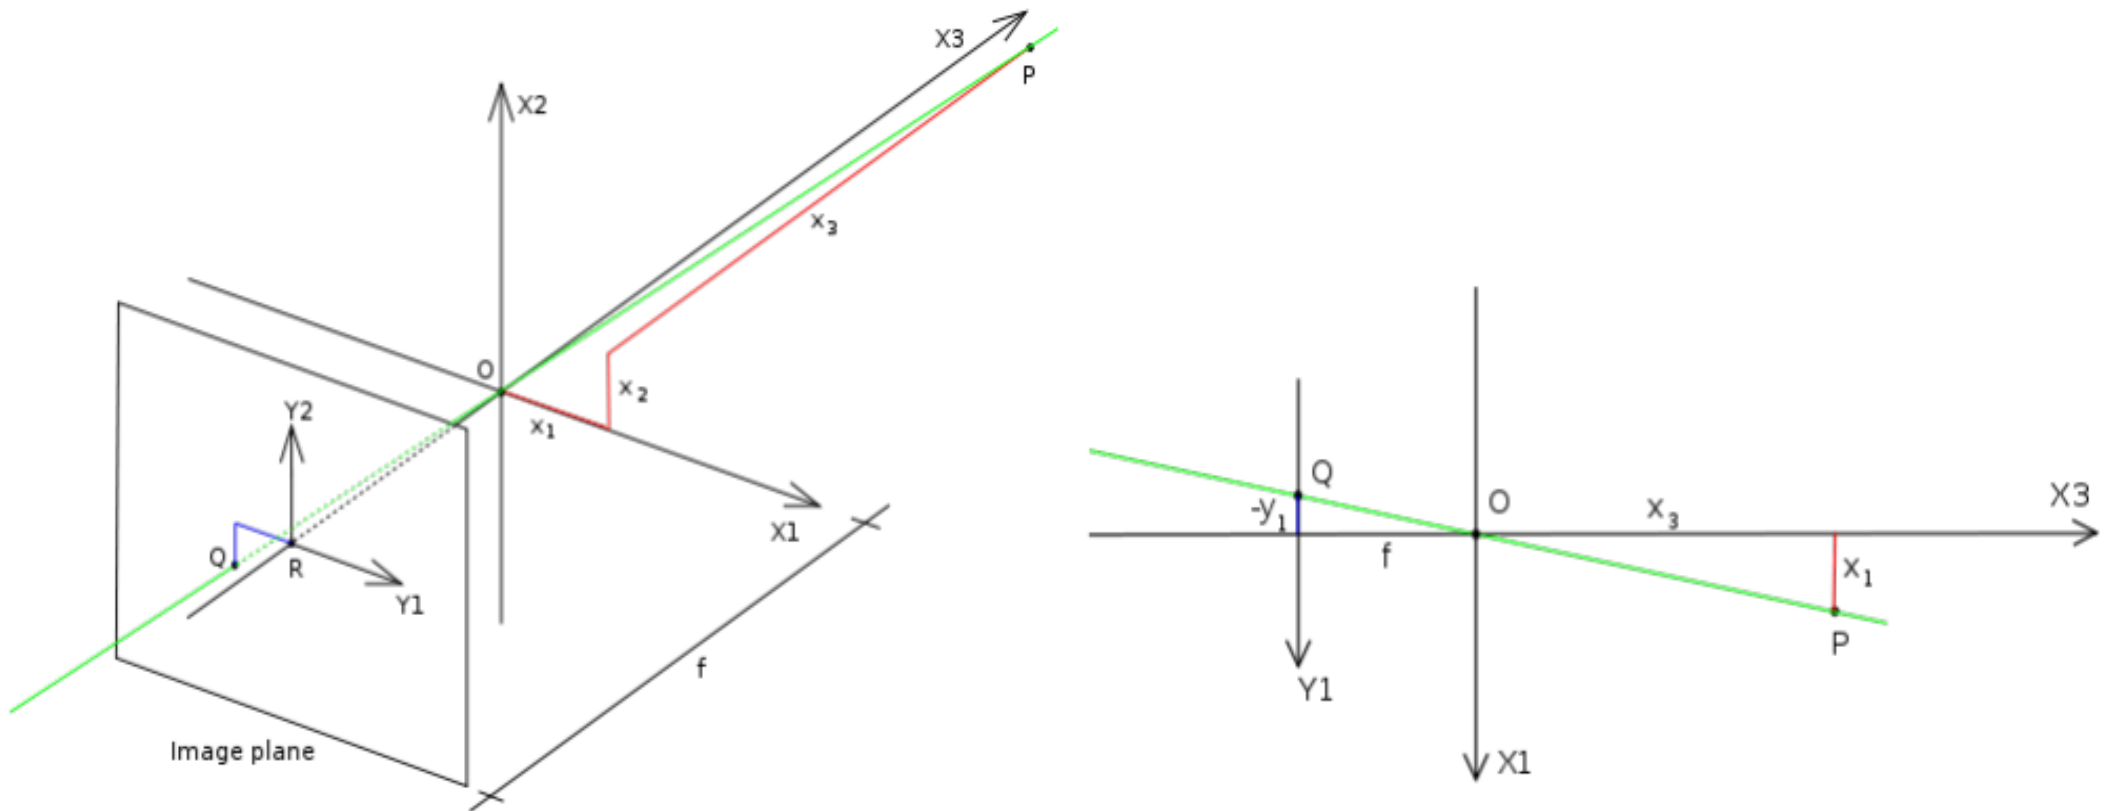

# Row Vs. Column Format

Remember this?

$$\mathbf{r}_0 = [x_0, y_0, z_0]^T$$
$$\mathbf{r}_d = [x_d, y_d, z_d]^T, \|\mathbf{r}_d\| = 1$$
$$\mathbf{r}_t = \mathbf{r}_0 + t \cdot \mathbf{r}_d$$

*One degree-of-freedom*



# Row Vs. Column Format

$$\mathbf{v} = \begin{bmatrix} v_1 \\ v_2 \\ v_3 \end{bmatrix} \neq [v_1 \quad v_2 \quad v_3] \quad (= [v_1 \quad v_2 \quad v_3]^T)$$

column format

$$\mathbf{M}\mathbf{v} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \end{bmatrix} \begin{bmatrix} u \\ v \\ w \end{bmatrix}$$

row format

$$\mathbf{v}^T \mathbf{M}^T = [u \quad v \quad w] \begin{bmatrix} a & d & g \\ b & e & h \\ c & f & i \end{bmatrix}$$

transposed

$$\mathbf{M}\mathbf{v} = (\mathbf{v}^T \mathbf{M}^T)^T$$

# Homogeneous Coordinates

$$\begin{bmatrix} x' \\ y' \\ z' \\ 1 \end{bmatrix} = \begin{bmatrix} \cdot & \cdot & \cdot & t_x \\ \cdot & \mathbf{R} & \cdot & t_y \\ \cdot & \cdot & \cdot & t_z \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Allow common operations to be represented as matrices

- Translation, rotation, projection


For positions and vectors, in 3D:

- $(x, y, z, w)^T \Rightarrow (x/w, y/w, z/w)^T$  for  $w \neq 0$
- $w = 1.0$ : position
- $w = 0.0$ : vector



ROYAL INSTITUTE  
OF TECHNOLOGY

# Lighting and Shading



# Applications



## Photorealistic

# Applications



**Non-photorealistic**

# Lighting Vs. Shading

- Lighting
  - Interaction between materials and light sources
- Shading
  - Deciding the colour of a pixel
  - Based usually on a lighting model
  - Other methods possible too though

# How To Implement?

- Theory
  - General classifications
  - Lighting fundamentals
    - Lambertian illumination
  - Some shading models
    - Flat, Gouraud, Phong
  - Extensions
- Practice
  - Maths programming (vector operations, normals, plane, angles, intersections)

# Some Classifications

- View Dependent
  - Determine an image by solving the illumination that arrives through the view-port only
- View Independent
  - Determine the lighting distribution in an entire scene regardless of viewing position. Views are taken after lighting simulation by sampling the full solution to determine the view through the viewport



# Some Classifications

- Local Illumination
  - Consider lighting effects only directly from the light sources and ignore effects of other objects in the scene (e.g. reflection off other objects)
- Global Illumination
  - Account for all modes of light transport

# Why Go Local?

- Usually easy to control and express
  - Director's chair: important when you want a scene to look a certain way
- Fast
  - Easier to obtain real-time performance (or just tractable calculations)
- Does not require knowledge of the entire scene

But ...

- Not as accurate or compelling as global models

# How Can It Be Modelled?

- Use a *lighting model* as inspiration
- But real light extremely complicated to simulate
  - Light bounces around the environment
  - Heavy processing required even for coarse approximations
  - Simplifications allow real-time performance
- Lighting models:
  - Lambertian – we will consider this first
  - Phong – not to be confused with *Phong shading*
  - Blinn-Phong and others...

# Simplifications

- Simplification #1: use *isotropic point* light sources
- Isotropic means that the light source **radiates energy equally** in all directions
  - Simplifies our light source energy equations that we'll look at
  - When we mention light, we are really talking about **energy**
- Simplification #2: simulate only specific surface types
  - Makes it easier to specify materials and calculate reflections
  - But visually limited

# Radiant Intensity

- Light is defined by its *Radiant Intensity*,  $I$ 
  - Radiant Intensity is measured in *Watts/sr*
  - *sr* is the solid angle (in steradians)
  - $I = \phi / 4\pi r^2$
  - $\phi$  is the energy *leaving* the surface per unit time
  - Known as *power* or *flux* and measured in *Watts*
  - But: it's a point light source, so it radiates light equally in all directions
  - So  $r^2 = 1$  (unit sphere)
    - $\Rightarrow I = \phi / 4\pi$
- Now know energy leaving light source in any direction




# Inverse Square Law

- But we want to know the energy *arriving* at a surface
- This *irradiance*,  $E$ , may now be determined:
  - Irradiance is the flux per unit area at a point  $x$ , a distance  $r$  from the point light source
  - We know the source radiates  $I$  Watts in all directions
  - So the power is radiated through a sphere centred at the lightsource
  - At a distance  $r$  from the source, the surface area of this sphere is  $4\pi r^2$  => the power per unit area at  $x$  is:  $E = \phi / 4\pi r^2$
  - This assumes the surface at  $x$  is perpendicular to the direction to the light source
  - To handle all angles, we must apply the **cosine rule**


# The Cosine Law

- A surface orientated perpendicular to a light source will receive more energy than a surface orientated at an angle to the light source
  - More energy = brighter appearance
- The irradiance  $E$  is proportional to  $1/\text{area}$
- As the area increases, the irradiance decreases
  - As  $\theta$  increases, the irradiance (thus surface brightness) decreases:

Light source

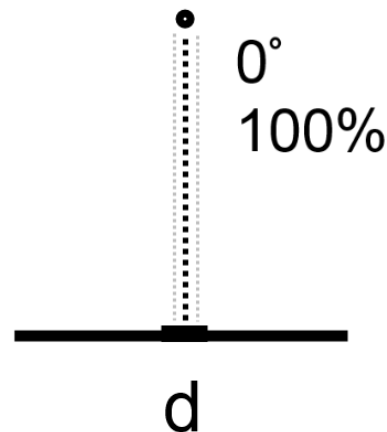

Light source

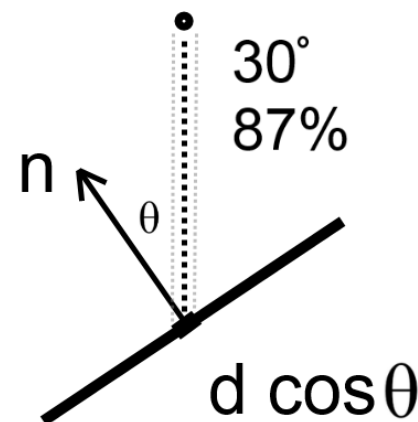

# Lambertian Illumination Model


- Cosine rule is used to implement Lambertian surfaces
  - Also known as *diffuse* surfaces
- Diffuse surfaces reflect light equally in all directions
- The surface is characterised by a reflectance parameter  $\rho_d$

$$\forall \rho_d(\mathbf{X}) = \phi_i / \phi_r$$

$\phi_i$  is the incident power

$\phi_r$  is the reflected power

- So the *reflectance* is the ratio of the total incident power to the total reflected power

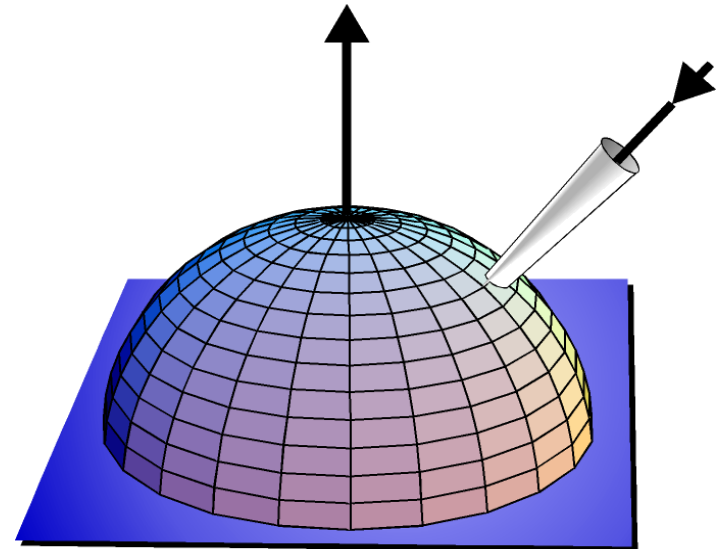



# Lambertian Illumination Model

- To shade a diffuse surface, we need to know
  - The normal to the surface at the point to be shaded
  - The diffuse reflectance of the surface
  - The positions and powers of the light sources in the scene
- Assuming contribution is from a single isotropic light source:

$$L_{r,d}(\mathbf{x}, \omega) = (\rho_d / \pi) \cos \theta (\phi_s / 4\pi d^2)$$

- $(\rho_d / \pi)$  accounts for the reflectance attribute of the surface
- $\cos \theta (\phi_s / 4\pi d^2)$  accounts for the orientation of the surface with respect to the light source

# Lambertian Illumination Model


- This is *local illumination*
  - Only concerned with energy hitting the surface directly from light sources
  - Not concerned with light bouncing off other surfaces and hitting the surface
  - =>Models derived from it are also local

# Basic Shading Models

- Flat, gouraud and phong shading
- Flat shading
  - Per polygon shading
- Gouraud shading
  - Interpolate (bilinearly) colour values to get tween pixels
  - Per vertex shading
- Phong shading
  - Interpolate normals
  - Per pixel shading

# Flat Shading

- Constant shading
- Very fast
- Very simple
- Does not look very smooth
- Compute the colour of a polygon
- Use this as the colour for the whole polygon

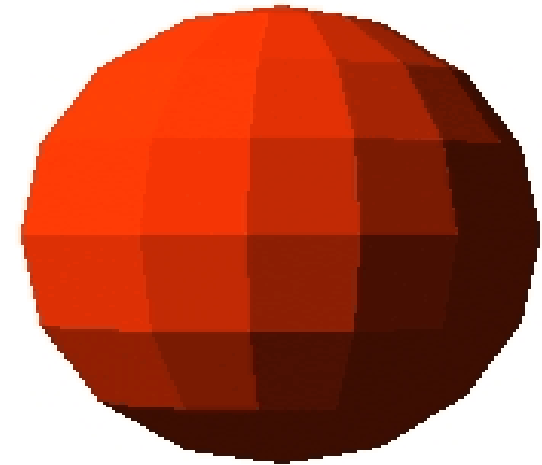



**Flat**



# Gouraud Shading

- Calculates the light intensity at each vertex in a polygon
- For each interior point in the polygon, we *interpolate* the light intensity determined at the vertices
- Given a starting value, and an end value, *interpolation* can be used to approximate intermediate values
  - Similar idea to the way in which colours are interpolated across the surface of a polygon
- We only need to do lighting calculations at the vertices
  - Fast !
- But lighting is only correct at the vertices
  - Unrealistic



# Gouraud Shading

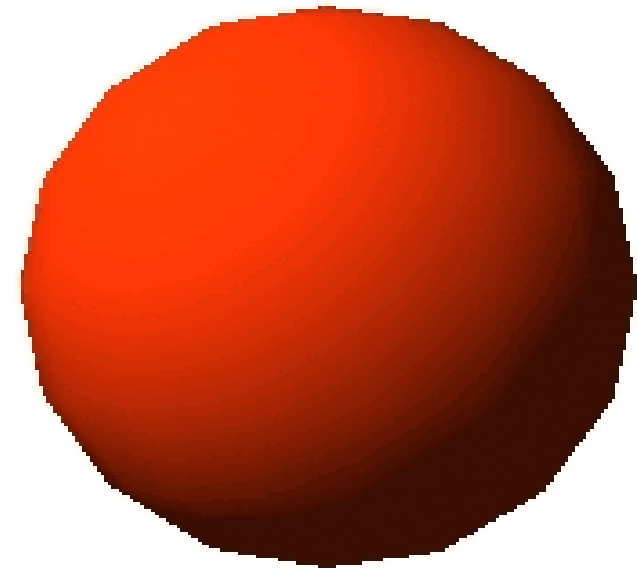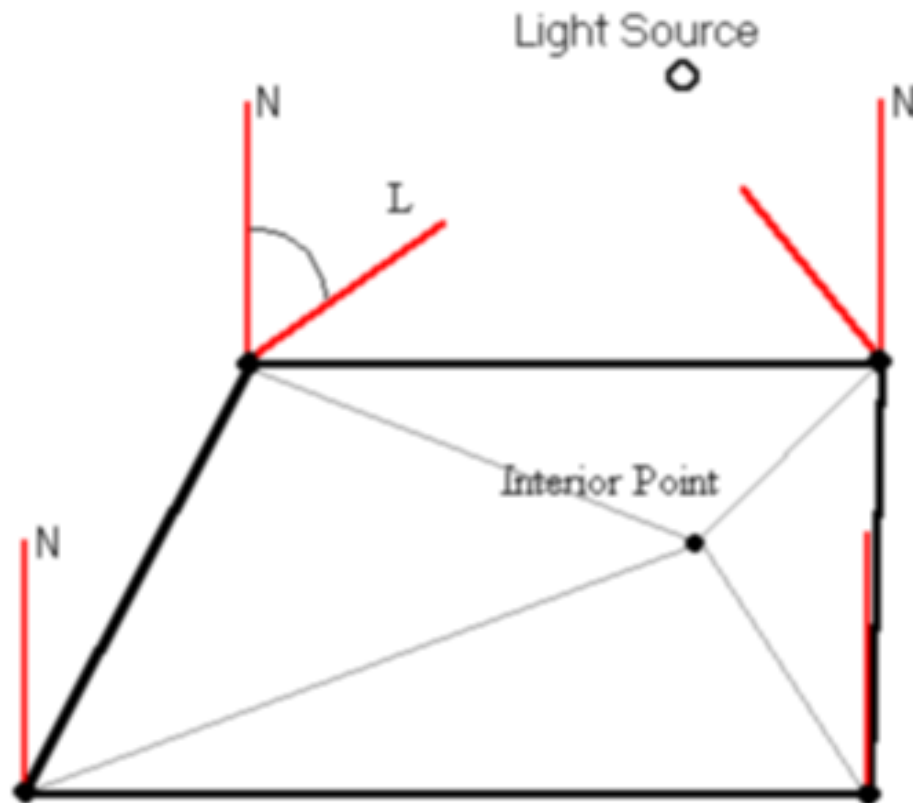

**Gouraud**

# Limitations

- Gouraud only calculates the actual lighting at the vertices of the polygon

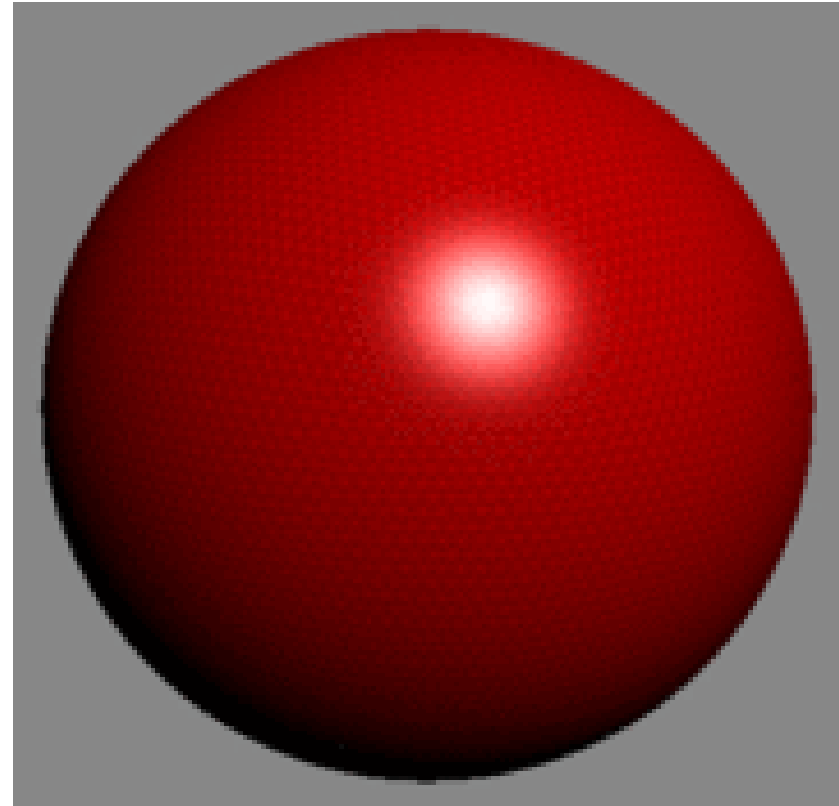
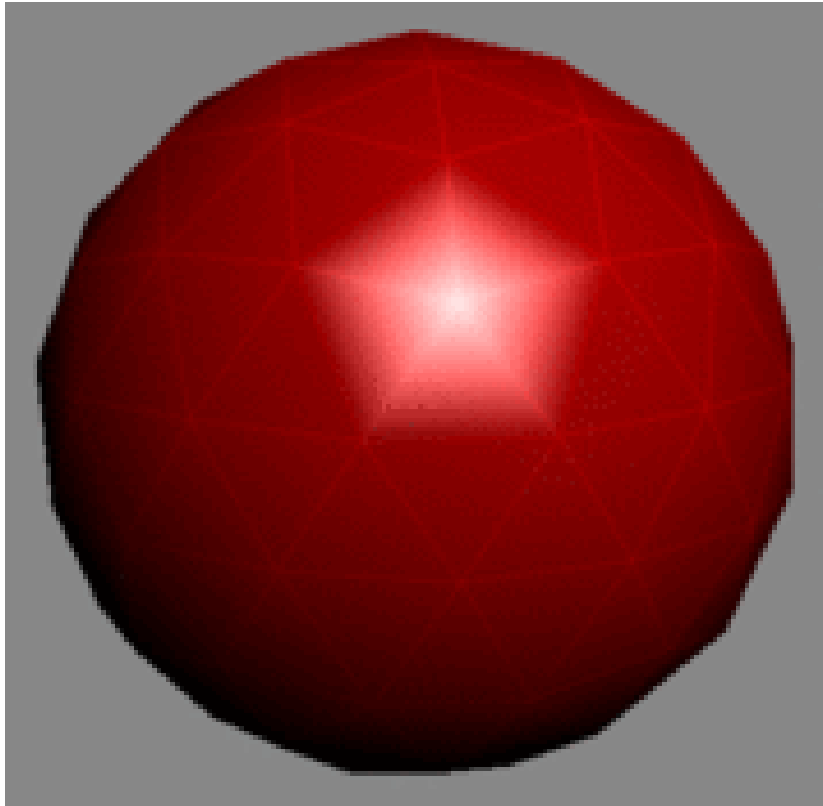


# Phong Shading

- To improve on Gouraud shading, interpolate normals across a surface
  - Lighting model then applied to each interior point in a polygon
- Must take care to ensure that all interpolated normals are of unit length
- This is known as *Phong Shading*
- Phong shading produces more accurate results than Gouraud Shading
- But slower !




# Phong Shading

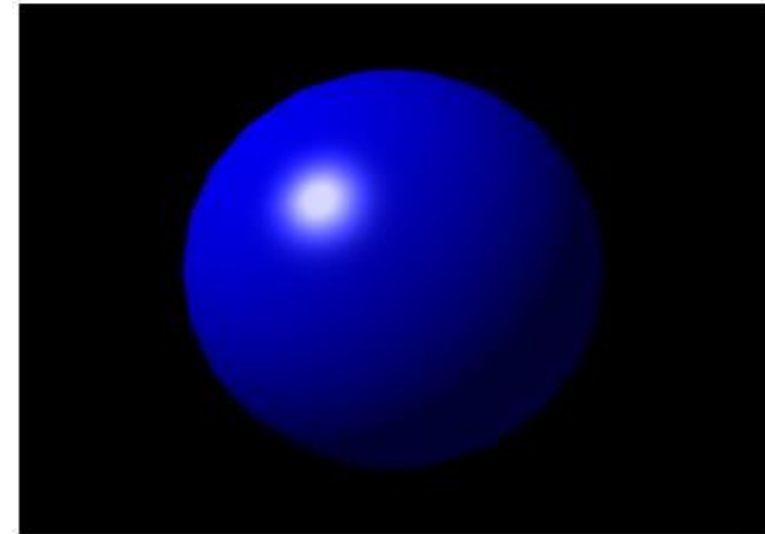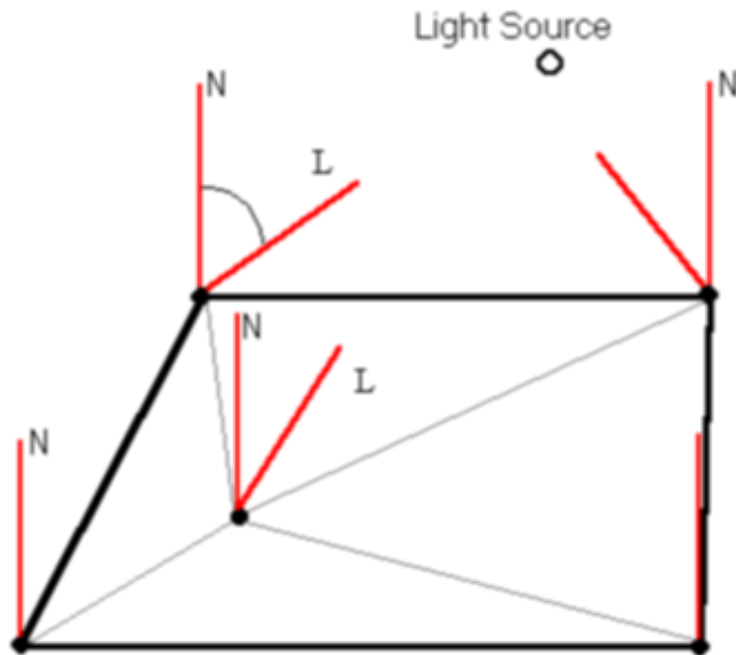

PHONG SHADING

- Phong shading can reproduce highlights in the center of a polygon that Gouraud Shading may miss

# Example

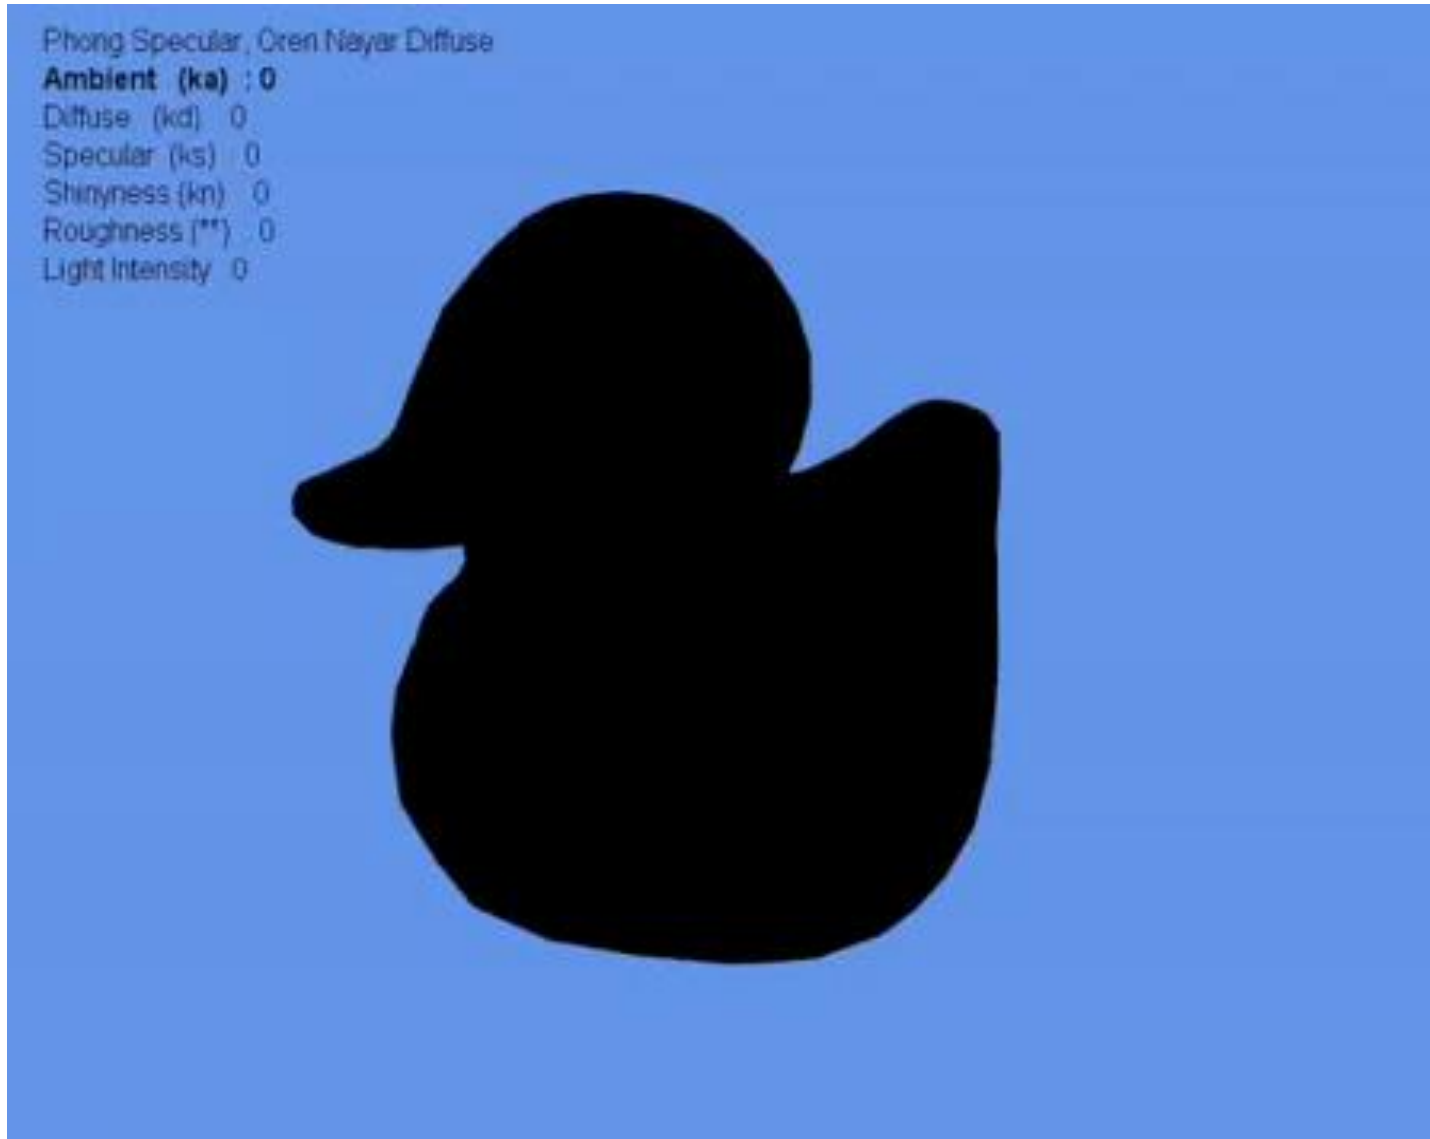

# Phong Illumination Model

- Lambertian Illumination model: only diffuse surfaces
  - Surfaces reflect light in all directions equally
- What about modelling shiny surfaces too?
  - Reflected radiance depends heavily on the outgoing direction
- Phong Illumination model consists of:
  - Lambertian Model for diffuse surfaces
  - A function to handle specular reflection
  - Ambient term to approximate all other light



ROYAL INSTITUTE  
OF TECHNOLOGY

# Phong Illumination Model

**NOT the same as Phong Shading**



# Phong Illumination Model

- Allows us to model many different types of surfaces
- Easy to control (by humans)
- Not a very realistic model
  - But produces good results
- Each object has material data associated with it:

$\rho_a$  ambient reflectance


$\rho_d$  diffuse reflectance

$\rho_s$  specular reflectance


$n$  phong exponent (shininess parameter)

# Materials

- Parameters:
- Interaction with light
- Reflective properties
- Components
  - $m_{\text{ambient}}$ ,  $m_{\text{diffuse}}$ ,  
 $m_{\text{specular}}$
- Proportion of each colour reflected

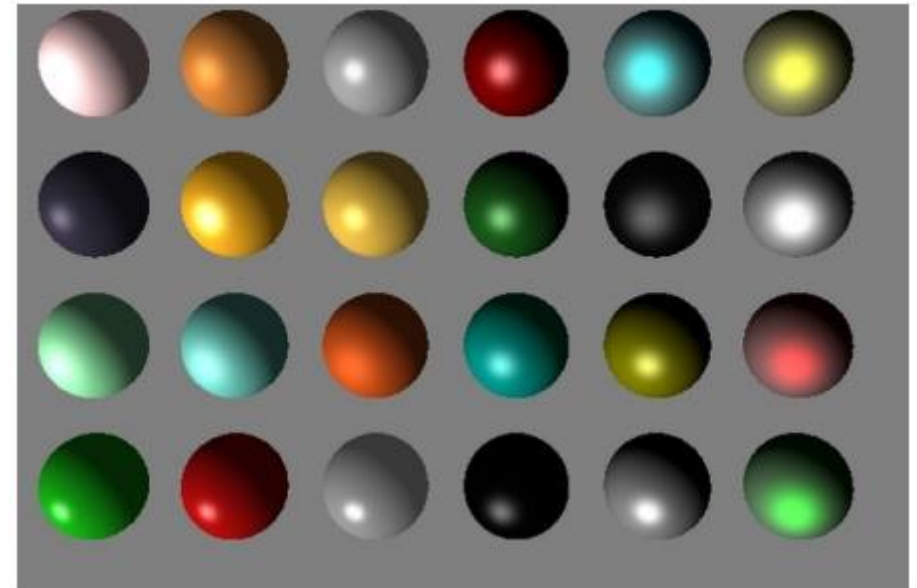

# Lambertian Vs Phong

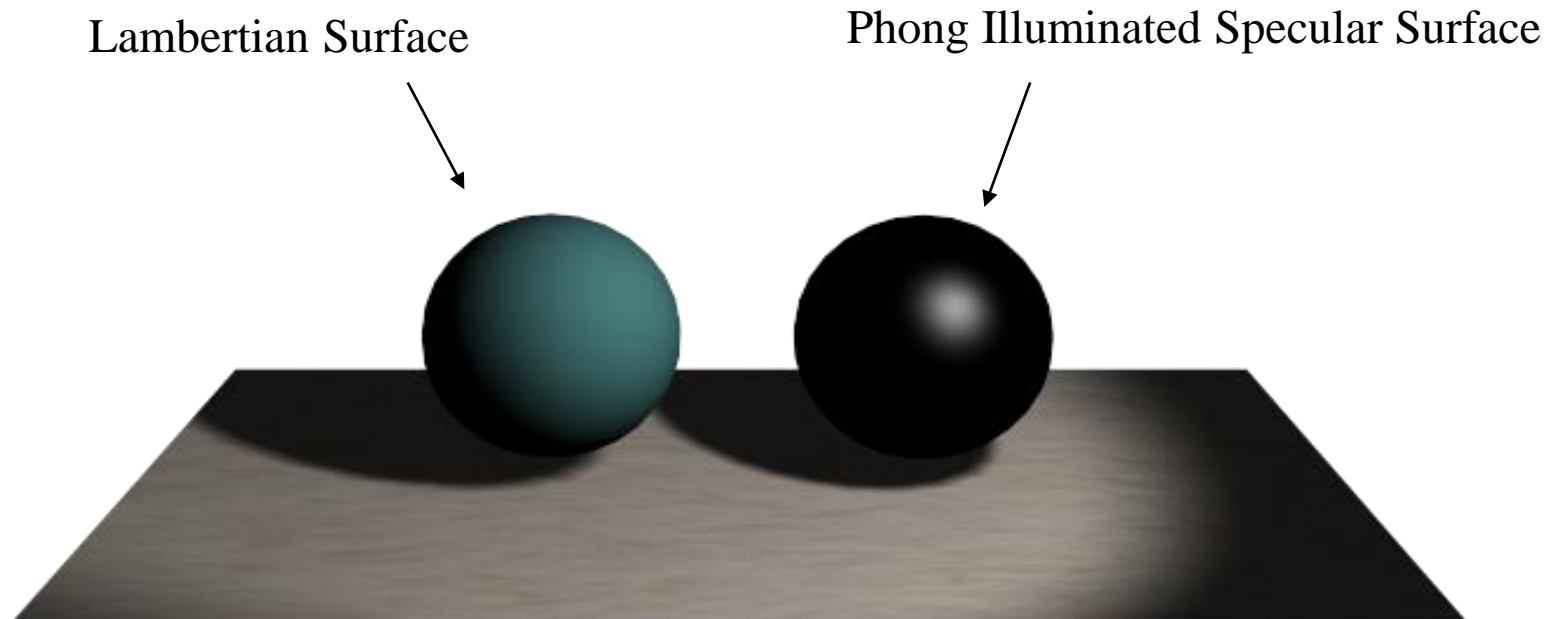

# A little bit of OpenGL (1.2 ← old)

- Light sources
- LIGHT0 to LIGHT7
- Each light must be enabled ...  
`glEnable(GL_LIGHT1);`
- Can specify light parameters using  
`glLightf{iv}(GL_LIGHT0, param, value);`
- Some parameters  
`GL_AMBIENT`  
`GL_DIFFUSE`  
`GL_SPECULAR`  
`GL_POSITION`



# Shading in OpenGL 1.2

- To enable lighting use:

```
glEnable (GL_LIGHTING) ;
```

OpenGL does not support true Phong shading; it interpolates the intensities across each polygon


Gouraud shading

```
glShadeModel (GL_SMOOTH) ;
```

# Material Properties

- We can assign different properties to each side of a polygon
- To assign material properties:

```
glMaterial{if}v(face, param, value);
```

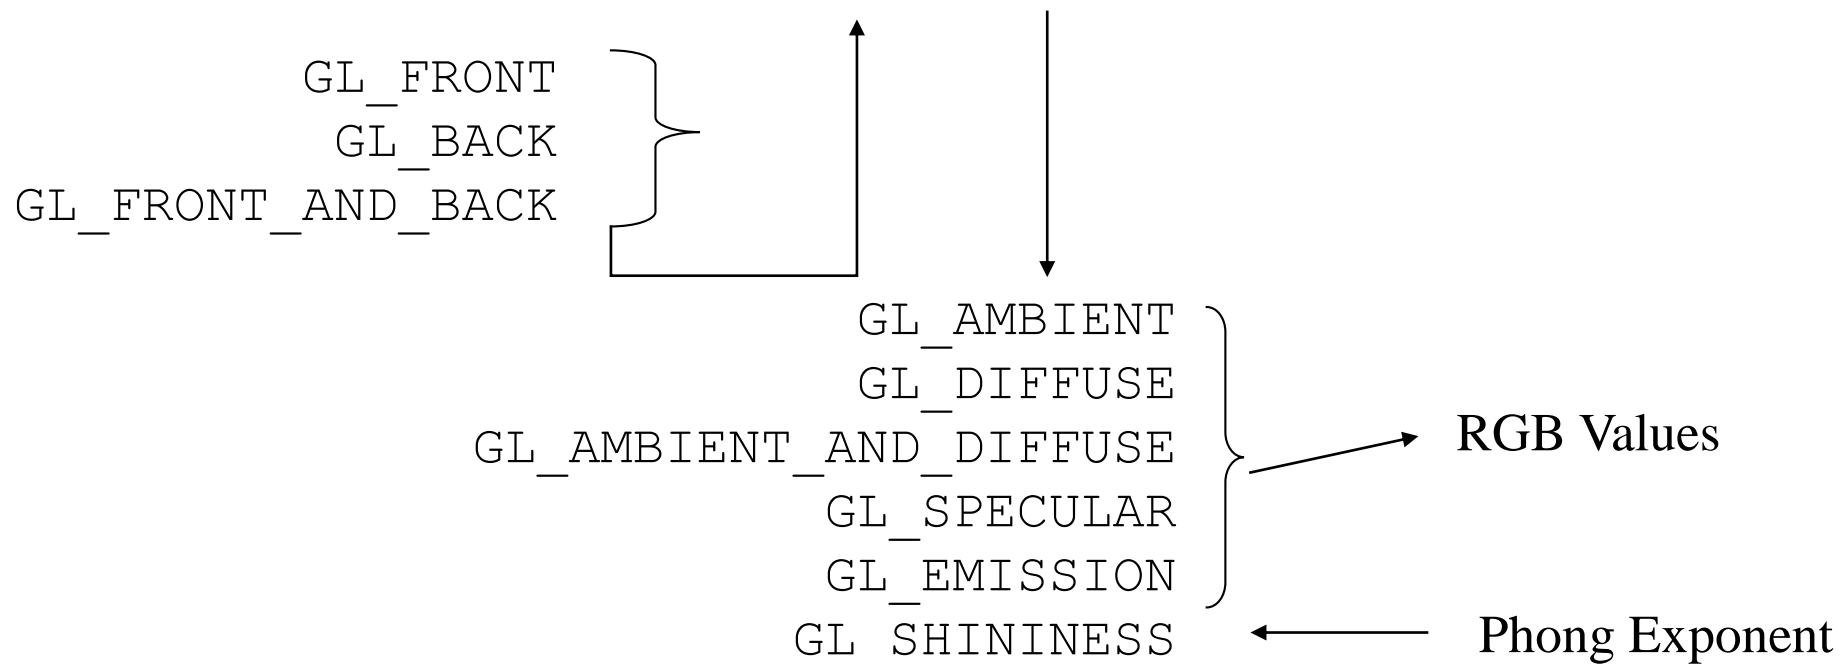

# Shaders

- Modern way of implementing rendering techniques
- Various types:
  - Pixel
  - Vertex
  - Geometry
  - Tessellation
- Shader languages
  - HLSL, GLSL, CG
  - <http://forum.unity3d.com/threads/announced-advanced-shader-pack.155683/>

color outputs to pixel shader.

```
void main( in a2v IN, out v2p OUT )
{
```

input parameters include view project matrix ModelViewProj, view inverse transpose matrix ModelViewIT, and light vector LightVec.

```
    OUT.Position = mul(IN.Position, ModelViewProj);
```

multiply position with view project matrix

```
    float4 normal = mul(IN.Normal, ModelViewIT);
    normal.w = 0.0;
    normal = normalize(normal);
    float4 light = normalize(LightVec);
    float4 eye = float4(1.0, 1.0, 1.0, 0.0);
    float4 vhalf = normalize(light + eye);
```

transform normal from model-space to view-space, store normalized light vector, and calculate half angle vector. float4(1.0, 1.0, 1.0, 0.0) is a vector constructor to initialize vector float4 eye.


.xyzz, a swizzle operator, sets the last component w as the z value.

```
    float diffuse = dot(normal, light);
    float specular = dot(normal, vhalf);
    specular = pow(specular, 32);
```



# Example: Bump Mapping

- Lots of cool effects possible
- Bump mapping: modify surface normals for lighting calcs (not actual geometry)
- Query a heightmap
- See also: normal mapping

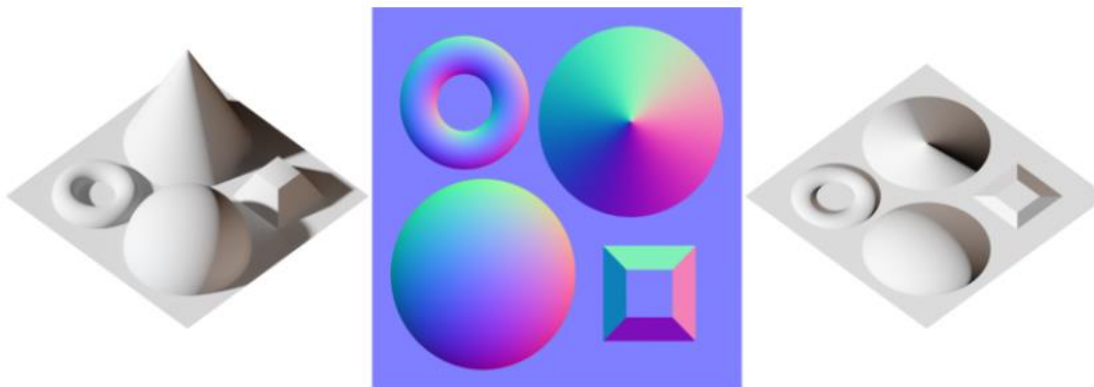

# Next Meetings

## Lab session

- Wednesday 11<sup>th</sup> April
- 15:00-17:00 (now!)
- VIC Studio

## Lecture: Collision Detection

- Monday 16<sup>th</sup> April
  - 08:00 – 10:00 V1
- Fangkai Yang*